

CRC

- Rectangular section tank with conical bottom and wide dimensions axial outlet.
- Removable upper top with complete opening.
- *Suitable for transport and storing of high viscous products or powders and granulates.*


TECHNICAL FEATURES

Stainless steel cold-rolled AISI 304 tank (AISI 316 upon request), 2b finish. Cold-forged bottom covers with optimised shape, minimum thickness: 2 mm. Robotized TIG welding process. Pickled and passivated seams.

Hot dip galvanised steel DIN 45706 protection frame with 2 mm thickness. Tank chamber with anti-vibration rubber pads. Palletised base with fork-slot for lift truck and hand pallet-trucks.

ACCESSORIES UPON REQUEST

- Different types of rapid fittings or nipples.
- Stirrers, washing systems, etc.
- Level gauges.
- Insulation and heating plates.
- It is possible to make dimensional changes and customised equipment to meet all needs.

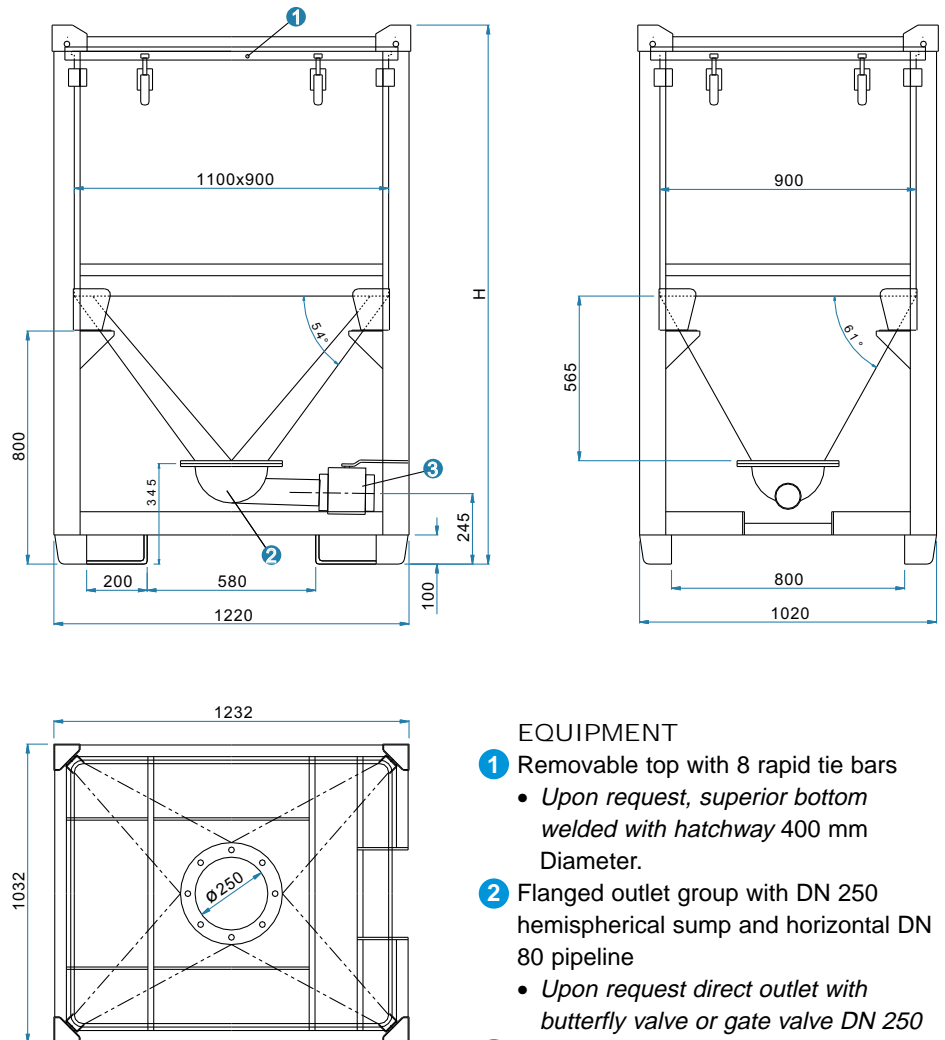

EQUIPMENT

- Removable top with 8 rapid tie bars
 - Upon request, superior bottom welded with hatchway 400 mm Diameter.
- Flanged outlet group with DN 250 hemispherical sump and horizontal DN 80 pipeline
 - Upon request direct outlet with butterfly valve or gate valve DN 250
- Ball or butterfly outlet or gate valve, max diam. DN 80 (3")

MODEL	capacity liters	tare weight Kg	base thickness mm	height H mm	basic size mm
CRC 500	540	210	2.0	1350	1032 X 1232
CRC 750	790	230	2.0	1600	
CRC 1000	1050	250	2.0	1840	
CRC 1250	1210	265	2.0	2000	